

铭客钢带  
Mingke Steel Belt

平板硫化机专用钢板  
Steel Plate for Plate Vulcanizer



上海铭客传动系统有限公司

电话: 021-33616578

邮箱: lin@mingkebelt.com

地址: 上海市闵行区沪闵路 6088 号凯德闵行商业中心 1906 室, 邮编 201199

Shanghai Mingke Process Systems Co.,Ltd.

Tel: 021-33616578

E-mail: sales@mingkebelt.com

Add: Rm. 1906, Capitaland Minhang Plaza, No. 6088 Humin Rd.,  
Minhang Dist., Shanghai 201199, China

工厂 | 南京铭客传动系统有限公司

电话: 025-56806003

地址: 江苏省南京市高淳经济开发区桃园北路 50 号, 邮编 211316

Factory | Nanjing Mingke Process Systems Co.,Ltd.

Tel: 025-56806003

Add: No. 50 North Taoyuan Rd., Gaochun Economic Dvpt. Zone,  
Nanjing City, Jiangsu Prov. 211316, China

[www.mingkebelts.com](http://www.mingkebelts.com)



上海铭客传动系统有限公司  
Shanghai Mingke Process Systems Co.,Ltd.

RUBBER INDUSTRY  
橡胶行业

橡胶压板-平板硫化机





## 平板硫化机专用钢板 Steel Plate for Plate Vulcanizer

平板硫化机是一种用于各种橡胶模压制品硫化成型的专用设备，配置优质的钢板，可以提升产品质量，减少更换频率。  
铭客提供的钢板双面精磨，有良好的平整度和光洁度，且硬度较高，满足平板硫化机严苛的生产环境。

Plate Vulcanizer is a special equipment for various rubber molded product of the vulcanization molding, the configuration of high-quality Steel plate, can improve product quality, reduce the frequency of replacement.  
The steel plates provided by Mingke are grinding on both side. It has good flatness and smoothness, and the hardness meet the harsh production environment of the Plate Vulcanizer.

### 平板硫化机单层热板安装 Installation of Single-layer Hot Plate for Plate Vulcanizer



### 平板硫化机双层热板安装 Installation of Double-layer Hot Plate for Plate Vulcanizer



### 平板硫化机的应用 Applications of Plate Vulcanizer

• 橡胶板 Rubber sheet

• 橡胶输送带 Rubber conveyor belt



### 钢带尺寸 Dimension of Steel Belt

- 长度 Length- 可定制 Customize available
- 宽度 Width- 1000/1200/1550/... mm
- 厚度 Thickness- 1.0/1.2/1.6/1.8/2.0/2.3/2.7/3.0/3.5 mm


提示：单幅钢带最宽宽度 1550mm，超过此宽度需要纵向拼接；  
特殊规格可以定制。  
Tips: Max. width of a single belt is 1550mm, customized sizes  
-via cutting or longitudinal welding are available.

### 钢带型号 Steel Belt Model

**MT** MT1650 (维氏硬度 HV<sub>0.05</sub>: 480)




## 钢带服务 Steel Belt Services

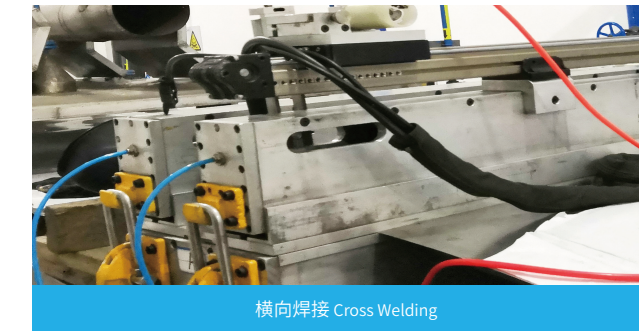

横向焊接 Cross Welding



快速补挖 Disc Patching

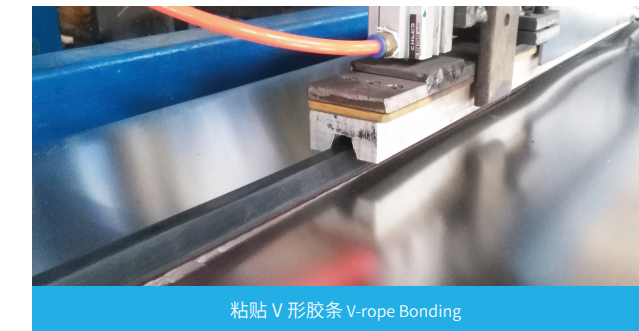

粘贴 V 形胶条 V-rope Bonding



裂纹修复 Crack Repairing

### 铭客钢带型号及主要性能参数 Steel Belt Model & Main Specifications

钢材类型 Type of Steel	马氏体不锈钢带 Martensitic Stainless Steel Belt	
指标 Index	型号 Model	MT1650
抗拉强度 (Mpa) Tensile Strength (Mpa)		1600
屈服强度 (Mpa) Yield Strength (Mpa)		1550
硬度 (HV <sub>0.05</sub> ) Hardness (HV <sub>0.05</sub> )		480
延伸率 % Elongation %		5
焊接系数 Welding Factor		0.8

\* 本资料中数据虽具代表性但并不受到绝对保证。数据亦会因所用材料不同而改变。  
\* The information and data presented in this data sheet are typical values, but not guaranteed. The information may be subjected to changes in material, properties and/or performance.